

GPA-570W

Rechargeable active speaker with wireless receiver,
863-865MHz, 16 channels



Features

- 40W RMS
- 1 receiver
- Built-in receiver, amplifier and antenna
- Digital display (lit when changing channels)
- To be used with OKAYO wireless transmitters
- Autotracking
- Volume and tone control
- Line out for feeding larger sound system, recording etc.
- MP3 with USB/SD audio player (accessory)
- Built-in rechargeable battery (lithium)
- 4-5 h. usage time
- AC/DC transformer
- Built-in microphone holder
- Can be supplemented with bodypack receivers with head/earphone or neck loop for hearing aid users

Portable speaker for flexibility

The GPA-570W speaker with built-in amplifier, wireless receiver and rechargeable batteries is designed to be carried around during the tour.

With autotracking, AC/DC transformer and line out for another system, it's a first class speaker.

Univox Okayo Microphone Systems

A wireless microphone system with all devices needed: microphones, receivers, speakers and accessories. With this wide range of options, the system is uniquely flexible and can be easily configured for different applications. It is equally suitable for use in schools, seminars, meetings, places of worship, product demonstrations, aerobics classes and guided tours.

Using the 863-865 MHz frequencies, the system is less sensitive to disturbances than systems using lower frequencies. The system is available for operation at different frequencies in the range from 514MHz up to 865MHz. Please contact us to discuss your requirements.

Please refer to separate data sheets for Okayo wireless microphones, stationary transmitters and diversity receivers.

Univox – co-developed with OKAYO

Univox and Okayo have co-developed body pack transmitters and receivers to improve speech intelligibility for hearing aid users. To comply with accessibility requirements and provide a good audio experience even for the hearing impaired, make sure you use these special developed products.

Technical data


Technical data – GPA-570W, 1 receiver, part no 504401

Out effect	40W RMS
Speaker element	5" Neodymium
Audio player (accessory)	MP3/USB/SD-reader, part no 504553
Receiver	DR-501A
Mic in	6,3 mm microphone, input level control
Line in	3,5mm AUX (stereo), input level control
Line out	3,5 mm AUX (stereo)
Power supply	AC 100-240V/DC 20V, 3,25A switched power supply
Built-in battery	12V, 3Ah, rechargeable lithium
Charge time	7-8 h
Usage time	4-5 h
Coverage	up to 70 m
Size	333 x 153 x 246 mm
Weight	3 kg (incl. battery)

Technical data – general OKAYO

PLL-receivers and -transmitters with frequencies 863-865 MHz
16 channels

LCD indication	channel, frequency, battery
Channel adjustment	frequency set, up/down
Switching bandwidth	Max. 12 MHz
Frequency deviation	80 kHz, with level control
Dynamic range	110 dB
Distorsion	<1%
Pre-emphasis	<50 µS
Silent mode	Tone key
Frequency response	70 Hz - 17 KHz

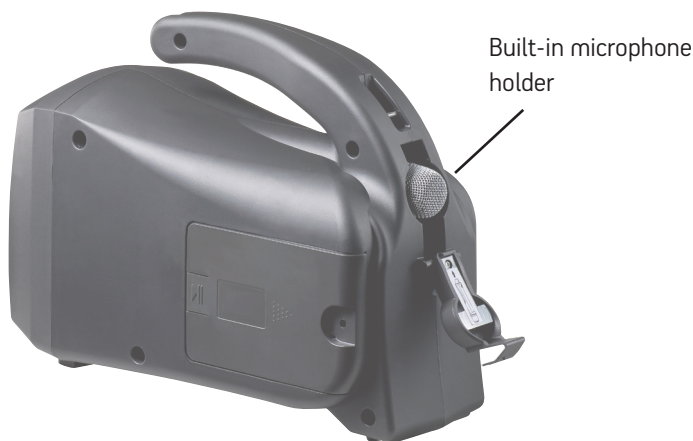

gpa-570w-br-gb 151104 Copyright © Bo Edin AB

 **univox**
BY EDIN

For complete manual and system components, please refer to univox.eu.

